


DAM Engine

Functional Design

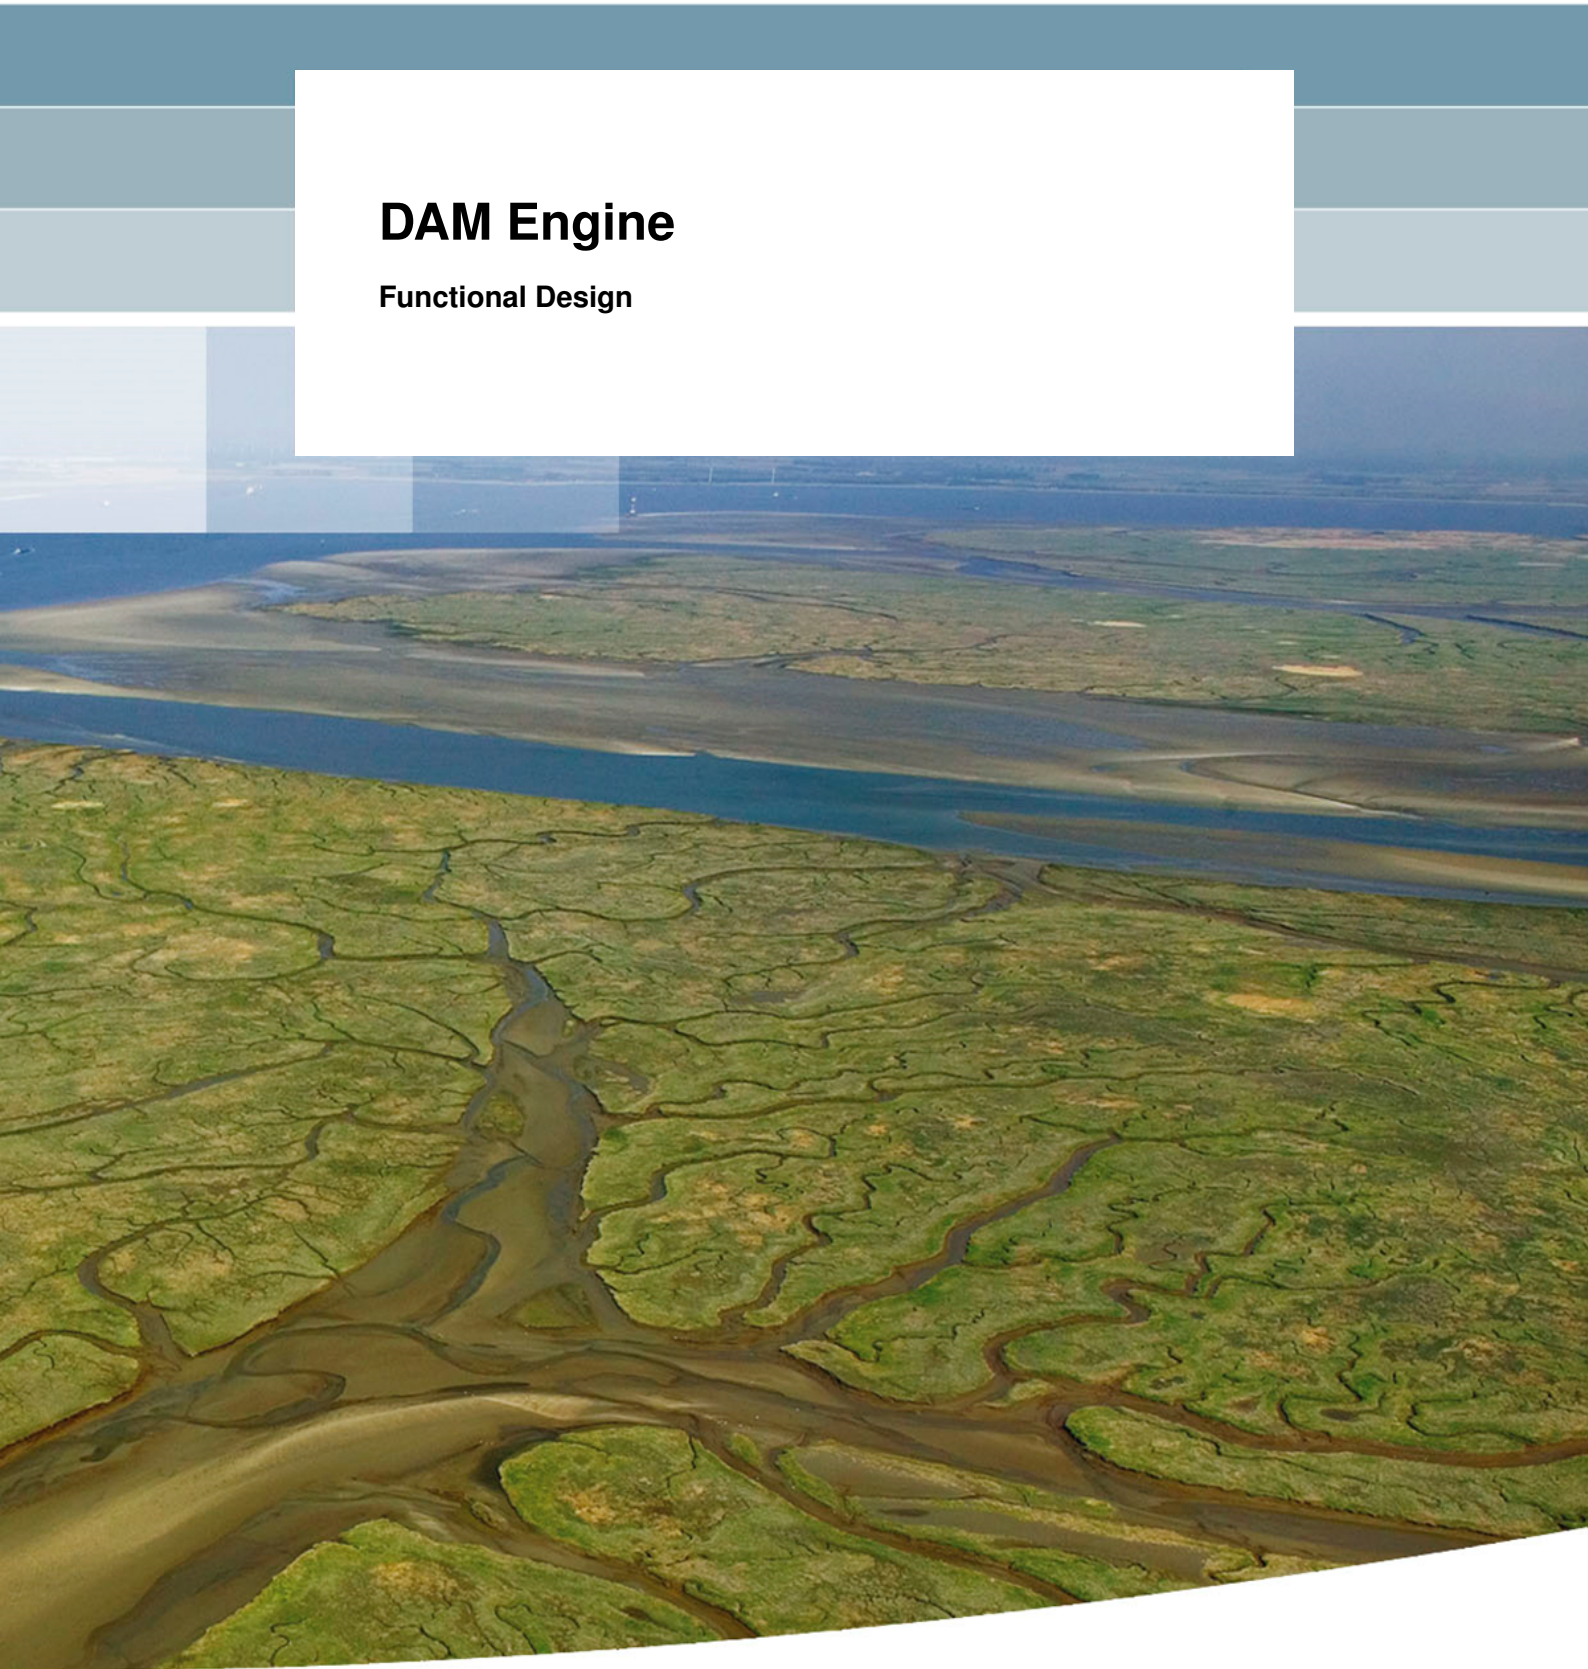

DAM Engine

Functional Design

1210702-000

Title

DAM Engine

ClientDeltares - Geo engineer-
ing DKS**Project**

1210702-000

Reference

1210702-000-GEO-0003

Pages

37

Classification

-

Keywords

Dike, safety assessment, design, software, macro stability, piping

Summary

This document contains the functional design for DAM Engine, a software module that computes the strength of a complete dike stretch with respect to several failure mechanisms, such as macro stability and piping.

Samenvatting

Dit document bevat het functioneel ontwerp voor DAM Engine, een software module die, gekoppeld aan een GUI, de gebruiker in staat stelt om voor een dijktraject berekeningen uit te voeren voor verschillende faalmechanismen, waaronder macrostabiliteit en piping.

ReferencesRefer to [chapter 3](#).

Version	Date	Author	Initials	Review	Initials	Approval	Initials
0.2	Sep 2019	Irene van der Zwan		Kin Sun Lam André Grijze		Leo Voogt	

Status

draft

This is a draft report, intended for discussion purposes only. No part of this report may be relied upon by either principals or third parties.

Contents

List of Figures	iii
List of Tables	v
1 Introduction	1
1.1 Purpose and scope of this document	1
1.1.1 Future options	1
1.2 Other system documents	1
1.3 Document revisions	2
1.3.1 Revision 0.1	2
1.3.2 Revision 0.2	2
2 Functional requirements	3
2.1 Data	3
2.1.1 REQ Data.Format	3
2.1.2 REQ Data.Content	3
2.2 Calculation	3
2.2.1 Kernels	4
2.2.2 REQ Calc.Design.Geometry	4
2.2.3 REQ Calc.Operational.Sensor	4
2.2.4 REQ Calc.Design.Excavation	4
2.3 Output	4
2.3.1 REQ Output.format	4
3 Literature	5
Appendix	7
A Use of the D-Geo Stability Kernel 18.1	9
A.1 Model	9
A.1.1 Combination Bishop/Uplift Van	9
A.2 Slip plane definition and calculation area	9
A.2.1 Grid generation	9
A.2.2 Tangent lines generation	10
A.2.3 Calculation area	10
A.3 Shear strength model	10
A.4 Zone Plot	11
A.5 Calculation options	11
A.6 Traffic load Degree of consolidation	12
B Uplift calculation	13
C Use of DAM Piping kernel	15
C.1 Rekenregel van Bligh	15
C.2 Sellmeijer 4 krachten model	15
C.3 Sellmeijer (VNK)	16
D Use of WBI piping kernel	17
D.1 Uplift (uplift safety)	17
D.2 Heave	17
D.3 Internal erosion (backward erosion)	18

Deltares

E	REQDesignGeometry	21
E.1	Raising the crest	21
E.2	Reducing the gradient of the slope	24
E.3	Shoulder adaption	24
E.4	Restrictions use of design mode	25
F	REQ Generation.PorePressures	27
F.1	Conditions under which the automatic generation works	27
F.2	Procedure for schematisation of the pore pressures	27
F.3	Schematisation of the phreatic plane	27
F.3.1	ExpertKnowledgeRRD	27
F.3.2	ExpertKnowledgeLineairDike	29
F.3.3	Particular cases	29
F.4	Initial schematisation of piezometric heads	30
F.5	Correction for uplift	33
F.6	Definitive schematisation pore pressures	36

List of Figures

A.1	Forbidden zone factor	12
C.1	Schematisering ondergrond voor neurale netwerk van Sellmeijer	16
E.1	Adapted geometry for DTH	22
E.2	Adapted geometry by deleting geometry points	22
E.3	Adapted geometry when outer shoulder is present	22
E.4	Adapted geometry with starting point for geometry of outer toe and larger dike base	23
E.5	Moving the ditch	23
E.6	Iterative reduction of the gradient of the inner slope on the basis of the exit point of the slip circle	24
E.7	Iterative shoulder development for macrostability	25
F.1	Schematisation Phreatic line (PL1) Macrostability inward using ExpertKnowledgeRRD	28
F.2	Schematisation Phreatic line (PL1) Macrostability inward using ExpertKnowledgeLinear	29
F.3	Adaption of phreatic line (PL1) when initial line would go up	30
F.4	Schematization of the water pressures in 1 aquifer situation	32
F.5	Use of damping factor (f) and reduction of piezometric level at polder side (X) for horizontal schematization of water levels	33
F.6	Lowering of piezometric head in the presence of uplift. DAM Engine checks for uplift starting at the inner toe and extending to the edge of the profile and adapts the piezometric head accordingly until an unstable equilibrium is attained.	34
F.7	Flowchart check Uplift when ditch is present.	35
F.8	Uplift calculation when ditch is present, thickness layer is larger than ditch	35
F.9	Uplift calculation when ditch is present, thickness layer is smaller than ditch	36
F.10	Uplift calculation between toe and ditch after uplift calculation at ditch	36

List of Tables

1.1	DAM Engine system documents.	1
A.1	Calculation area for horizontal balance	10
A.2	Forbidden zone factor	11
D.1	Input paramaters Heave	17
D.2	Input paramaters Internal erosion	19
F.1	Parameters for each schematisation point used to locate the phreatic plane in the ExpertKnowledgeRRD schematisation option	28
F.2	Overview and description of piezometric lines	31

1 Introduction

1.1 Purpose and scope of this document

This document contains the functional design for the DAM Engine, a computational engine for the automated calculation of the strength of dikes. DAM was developed by Deltares with and for STOWA for all water authorities. This document describes requirements and functional design of DAM Engine. So it is clear what the purpose of DAM Engine is and which functionality What will actually will be implemented depends on the prioritizing of the requirements by the clients using this DAM Engine. If some functionality is not (yet) needed, then that part does not need to be implemented.

1.1.1 Future options

As mentioned above this document contains some options that will not be implemented in the first release, but are foreseen to be implemented in the near future. Therefore although sometimes a reference will be made to these options, these will not be described in detail yet.

That applies in particular to the following subjects:

- NWO module("Niet Waterkerende Objecten")
- WBI failure mechanisms (Piping, Macrostability)

1.2 Other system documents

The full documentation on the program comprises the following documents.

Title	Content
DAM Engine- Architecture Overall (The, 2017a)	Description of overall architecture of the DAM Engine and its components.
DAM Engine- Functional Design (this document) (Zwan, 2017)	Description of the requirements and functional design.
DAM Engine- Technical Design (The, 2017b)	Description of the implementation of the technical design of DAM Engine.
DAM Engine- Technical documentation (Doxygen, 2017)	Description of the arguments and usage of different software components, generated from in-line comment with Doxygen.
DAM Engine- Test Plan (Trompille, 2017a)	Description of the different regression and acceptance tests, including target values. (not available yet).
DAM Engine- Test Report (Trompille, 2017b)	Description of the test results (benchmarks and test scripts)(not available yet).
Architecture Guidelines (Kleijn <i>et al.</i> , 2017)	Architecture guidelines that are used by DSC-Deltares.
Overview of data used (Zwan, 2018)	Table with data used by DAM UI and DAM Engine

Table 1.1: DAM Engine system documents.

1.3 Document revisions

1.3.1 Revision 0.1

First concept of the document.

1.3.2 Revision 0.2

Textual adaptations.

Assessment is removed from the requirements. sec:TLDegOfCo added.

2 Functional requirements

Main purpose of the DAM Engine is to get data from DAM Clients, use this data as calculation input and make serially calculations demanded by the DAM Client with one or more kernels and generates output. This can be broken down to the next user stories:

User story Design

As a user I want to adapt the geometry until given safety for stability or piping is met.

User story Operational sensors

As a user I want to make stability and/or piping calculations with the input from operational sensors.

Since most requirements are needed for both user stories, the requirements are classified per theme, not per User story. The themes are: data, calculation and output. The requirements per Use case are given in next table.

2.1 Data

2.1.1 REQ Data.Format

2.1.1.1 Location

Locations are defined by a unique name and RD coordinates.

2.1.1.2 Geometry

The geometry is defined by a surfaceline and characteristic points on this surfaceline. The surfaceline is limited by a surface level outside at the left side and surfaceline inside at the right side. The left side of the geometry is the riverside and the side of the variable water level outside. The right side is the polder side (inside).

2.1.1.3 Subsoil

The subsoil is defined by line shaped segments. Each segment is defined by one or more soil profiles with a probability (sums up to 100%). And a soil profile describes the boundaries of the layers and their material.

2.1.1.4 Water pressures

DAM Engine can schematize water pressures for piping and stability kernels, see [Appendix F](#). Data needed for this schematization consists of water levels and the schematization parameter water pressure per layer.

2.1.2 REQ Data.Content

The DAM Engine has a defined content for the data input, so DAM Clients know how to arrange the input data. The required data is described in xsd-files in <https://repos.deltares.nl/repos/dam/DamEngine/trunk/xsd>. An overview of the required data for the engine in relation to DAM UI data is described in [https://repos.deltares.nl/repos/dam/DamOverall/trunk/doc/DAM General/ OverviewDataUIAndEngine.xlsx](https://repos.deltares.nl/repos/dam/DamOverall/trunk/doc/DAM%20General/OverviewDataUIAndEngine.xlsx). In this Functional design is referred to parameters mentioned in this overview by giving the *name*.

2.2 Calculation

2.2.1 Kernels

The DAM Engine provides calculations with the following stability and piping kernels:

- 1 Stability; kernel used by D-Geo Stability 18.1
- 2 *Stability; kernel used by D-Stability 2019*
- 3 Piping; DAM-kernel piping
- 4 Piping; WBI-kernel piping

Italic printed functionalities are not implemented in DAM yet.

2.2.1.1 *REQ Calc.Kernel18*

The DAM engine can make stability calculations with the kernel of D-Geostability 18.1. The options used by the DAM engine are equal to the use of the kernel of D-Geostability 15.1 and are described in [Appendix A](#).

2.2.1.2 *REQ Calc.DAMPiping*

The DAM engine can make piping calculations with the DAM-piping kernel. The functional design of the DAM piping kernel is described in [Appendix C](#).

2.2.1.3 *REQ Calc.WBIPiping*

The DAM engine can make piping calculations with the WBI-piping kernel. The functional design of the DAM piping kernel is described in [Appendix D](#).

2.2.2 REQ Calc.Design.Geometry

The DAM engine must be able to generate new profiles (surfacelines) based on a desired Dike table height (DTH) and/or Factor of safety. This can be done by:

- 1 Raising the crest
- 2 Reducing the gradient of the slope
- 3 Shoulder development

The design of this geometry adoption is described in [Appendix E](#)

2.2.3 REQ Calc.Operational.Sensor

The DAM Engine must be able to use sensor data as input for the generation of water pressures.

2.2.4 REQ Calc.Design.Excavation

This will not be part of the implementation of DAM Engine and therefore this paragraph has not yet been written.

2.3 Output

2.3.1 REQ Output.format

<This section will describe what kind of output DAM Engine can provide.>

3 Literature

Doxygen, 2017. *DAM Engine - Technical documentation, Generated by Doxygen 1.8.10*. Tech. rep., Deltares.

Kleijn, E., A. Grijze, H. Elzinga, S. Hummel and T. The, 2017. *Architecture Guidelines*. Tech. rep., Deltares.

The, T., 2017a. *DAM Architecture Overall*. Tech. Rep. 1210702-000-GEO-0005, version 0.1, jan. 2017, concept, Deltares.

The, T., 2017b. *DAM Engine - Technical Design*. Tech. Rep. 1210702-000-GEO-0004, version 0.2, mar. 2017, concept, Deltares.

Trompille, V., 2017a. *DAM Engine - Test Plan*. Tech. Rep. 1210702-000-GEO-0006, version 0.1, jan. 2017, concept, Deltares.

Trompille, V., 2017b. *DAM Engine - Test Report*. Tech. Rep. 1210702-000-GEO-0007, version 0.1, jan. 2017, concept, Deltares.

Van Geer, P., 2017. *WTI2017 Failure mechanisms - Kernel Piping, Requirements and Functional Design*. Tech. Rep. 1220084-008-GEO-0001, version 7, definitief, Deltares.

Zwan, I. v., 2017. *DAM Engine - Functional Design*. Tech. Rep. 1210702-000-GEO-0003, version 0.1, jan. 2017, concept, Deltares.

Zwan, I. v., 2018. *Overview data DAM UI and Engine*. Tech. rep., Deltares.

Appendix

A Use of the D-Geo Stability Kernel 18.1

For stability calculation the DAM engine uses the kernel used by D-Geo Stability 18.1 This use is restricted to the options described in this chapter.

A.1 Model

The DAM Engine must be able to make calculations with following models:

- Bishop
- LiftVan (Uplift Van in D-Geostability)
- Horizontal balance

All models are available for inwards stability. For outward stability only Bishop is used.

The choice of the model is a demand of the client:

DAM Client can demand Bishop, Uplift Van or combination Bishop/Uplift Van.

A.1.1 Combination Bishop/Uplift Van

The combination Bishop/Uplift Van gives three results:

- 1 Bishop
- 2 Uplift Van
The client provides a requested uplift safety. The UpliftVan calculation is made when this requested uplift safety factor is lower than the calculated uplift safety factor (for definition see [Appendix B](#)). Otherwise the result is 'not calculated'.
- 3 Normative result (lowest safety factor) of both.

A.2 Slip plane definition and calculation area

A.2.1 Grid generation

For the models Bishop and LiftVan a calculation grid must be generated. There are two options:

- 1 automatic generation
- 2 user defined generation

Ad 1 Automatic generation

See FD of Macrostability kernel.

Ad 2 Client defined generation

The client defines the dimensions; number of gridpoints and distance between the points. The DAM Engine defines the position of the grid depending on the characteristic points: For Bishop and for the left grid of LiftVan the left (outside) bottom corner is situated at the surfaceline in the middle of the crest (distance between outer- and innercrest). The right bottom corner of the right (inside) grid of LiftVan is situated above the most right x co-ordinate where uplift occurs. With the restriction that the left bottom corner can not be situated left of the x co-ordinate of the DikeToePolder.

A.2.2 Tangent lines generation

For the models Bishop and LiftVan a tangent lines must be generated.

There are two options:

- 1 automatic generation
- 2 client defined generation

Ad 1 Automatic generation

Bishop

-to described-

Liftvan

-to described-

Ad 2 Client defined

For Bishop calculations the tangent lines can not be defined by the client.

For LiftVan the client must provide the distance between the tangent lines. The lower tangentline is always situated 5.0 m below the upper geometry point of the lowest aquifer. The tangentlines are drawn with the given distance until the upper tangent line is situated above the Z DikeToeAtPolder.

A.2.3 Calculation area

For the model Horizontal balance a calculation area must be defined:

Parameter	Default value
X co-ordinate left side [m]	x co-ordinate DikeTopAtRiver
X co-ordinate right side [m]	x co-ordinate DikeToeAtPolder
Highest slip plane level [m]	Z value PL4 or PL3 (when one aquifer present) at x co-ordinate DikeToeAtRiver
Lowest slip plane level [m]	Maximum Z value of top aquifer within calculation area
Number of planes in the slip plane level [-]	12

Table A.1: Calculation area for horizontal balance

A.3 Shear strength model

The DAM engine must be able to make stability calculations with following shear strength models:

- C-Phi
- Stress tables
- Cu calculated (with default initial surface level of D-Geo Stability; toplayer)
- Cu measured
- Cu gradient
- Pseudo values

This shear strength models are defined in the soil parameters per layer.

A.4 Zone Plot

The option of zone plot in D-Geo Stability is defined as the distinction of the slip circles in different zones; 1a, 1b, 2a, 2b, 3a and 3b, see manual D-Geo Stability.

DAM only uses zone 1 and zone 2. Zone Plot is used when *ZoneType* = ZoneAreas

The following settings for the Zone plot of D-Geo Stability are used by DAM:

- Dike table height: user defined : *DikeTableHeight*
- Dike table width: 3 m
- Start x co-ordinate restprofile: Xlocal;DikeTopAtRiver
- Boundary of design level influence at x: Xlocal;DSurfaceLevelInside
- Boundary of design level influence at y: maximal Y co-ordinate of surface line
- Required safety in zones: *RequiredSafetyFactorStabilityInnerSlope*

Calculation with zone areas is only possible for inward stability calculations.

A.5 Calculation options

D-Geostability offers different following calculation options. DAM Engine uses for the following settings the defaults of D-Geo Stability 18.1:

- Requested number of slices: default D-Geo Stability
- Minimum slip plan length: default D-Geo Stability
- Start value safety factor: default D-Geo Stability
- Minimum x-entrance used: default D-Geo Stability

The following settings can be defined by the client:

- Minimum circle depth
- Maximum x-entrance

The maximum x-entrance used is not directly client defined. The client provides a Forbidden zone and the DAM Engine calculates a maximum x-entrance via a method described in [section A.5.0.1](#).

A.5.0.1 Forbidden zone

Forbidden zone is an option to define a forbidden zone for the entrance point of the slip plane. The forbidden zone is situated to the right side of a certain x co-ordinate. This x co-ordinate is defined by the *ForbiddenZoneFactor*. $X_{local}; forbidden\ zone\ WF = (X_{local}; DikeTopAtPolder) + ForbiddenZoneFactor * (X_{local}; DikeToeAtPolder - X_{local}; DikeTopAtPolder)$ A forbidden zone is used when *ZoneType* = ForbiddenZone.

ForbiddenZonefactor	maximum x-entrance
0	x co-ordinate DikeTopAtPolder
1	x co-ordinate DikeToeAtPolder

Table A.2: Forbidden zone factor

In a picture:

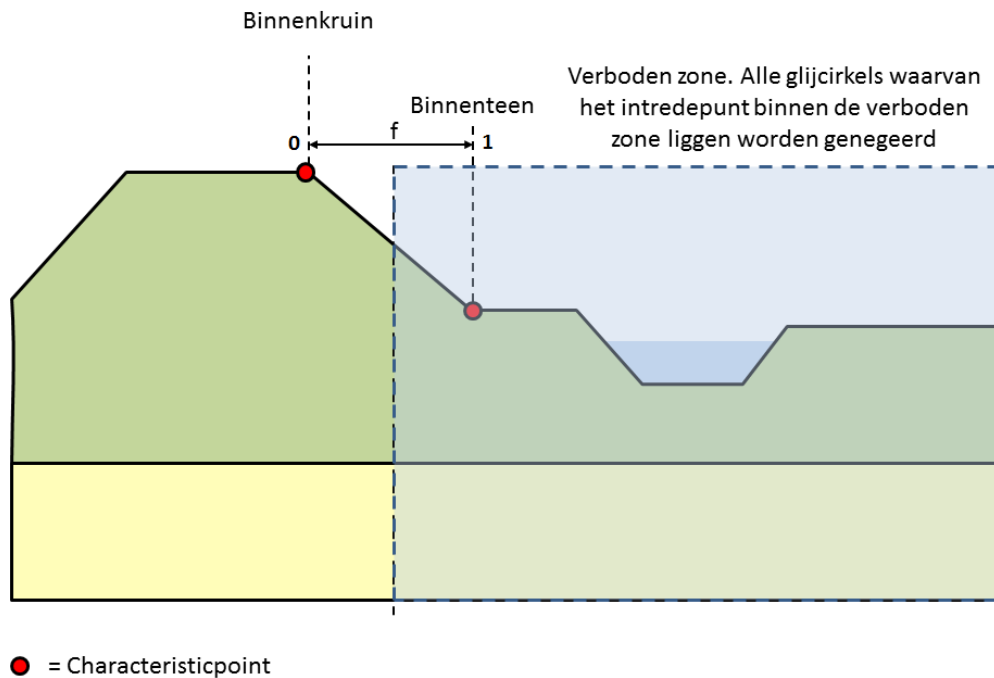


Figure A.1: Forbidden zone factor

A.6 Traffic load Degree of consolidation

The traffic load degree of consolidation is a material parameter. This may vary per location, per traffic load and hydraulic load. Therefore it must be possible to define the traffic load degree of consolidation per location.

In the UI the import of the traffic load degree of consolidation is done per material via soilmaterials.mdb and per location via csv-file or shape-file.

The hierarchy is:

- 1 Traffic load degree of consolidation per material.
For material types peat, clay and loam overwritten by:
- 2 Traffic load degree of consolidation per location.

So the Traffic load degree of consolidation of the material types sand and gravel keep the value from soilmaterials.mdb.

B Uplift calculation

DAM Engine makes calculations to see whether there is any uplift from the inner toe to the centre of the ditch bottom or to the right limit of the geometry if there is no ditch.

The formula from the VTV (2006) is used for this purpose.

$$Upliftsafety = \frac{\sigma_g}{\sigma_w} \quad (B.1)$$

The check for uplift is done at every surface line point from the characteristic point DikeToeAt-Polder to the centre of the ditch bottom or to the characteristic point SurfaceLevelInside (from left to right).

The check for uplift has the following purposes:

- To decide if a LiftVan calculation is required, see [section A.1.1](#).
- To generate the piezometric levels, see [section F.5](#)

C Use of DAM Piping kernel

<chapter partialy in Dutch>

Voor piping kan gekozen worden uit de volgende opties:

- 1 Bligh
- 2 Sellmeijer 4 krachten model
- 3 Sellmeijer (VNK)
- 4 Sellmeijer revised(WBI)

C.1 Rekenregel van Bligh

Hier wordt gebruik gemaakt van de standaard piping regel van Bligh met een creep factor van 18:

$$L \geq H \cdot C_{creep}$$

C.2 Sellmeijer 4 krachten model

Hier wordt gebruik gemaakt van de regel van Sellmeijer zoals omschreven in de TR Zand-meevoerende wellen uit 1996:

$$\Delta H_c = \alpha c \frac{\gamma_p}{\gamma_w} \tan(\theta) (0.68 - 0.10 \ln(c)) L$$

waarbij:

$$\alpha = \left(\frac{D}{L} \right)^{\left(\frac{D}{L} \right)^{0.28} - 1}$$

$$c = \eta d_{70} \left(\frac{I}{\kappa L} \right)^{\frac{1}{3}}$$

$$\kappa = \frac{\nu}{g} k = 1.35 \cdot 10^{-7} k$$

ΔH_c het kritieke verval over de waterkering
 γ_w het volumegewicht van water [kN/m³]
 γ_p het (schijnbaar) volumegewicht van zandkorrels onder water [= 17 kN/m³]
 θ de rolweerstandshoek van de zandkorrels [°]
 η de sleepkrachtfactor (coëfficiënt van White) [-]
 κ de intrinsieke doorlatendheid van de zandlaag [m²]
 d_{70} 70-percentielwaarde van de korrelverdeling [m]
 D de dikte van de zandlaag
 L de lengte van de kwelweg (horizontaal gemeten) [m]

C.3 Sellmeijer (VNK)

De pipingberekeningen met het VNK model, een neurale netwerk gebaseerd op het twee lagen model van Sellmeijer. Het model bestaat uit een grote collectie voorgemaakte sommen. De invoerparameters worden vergeleken met de invoer voor de voorgemaakte sommen en de uitkomst volgt door een interpolatie. In de eenvoudige toetsing wordt geen onderscheid gemaakt tussen een boven- en onderliggende zandlaag. Voor de berekeningen wordt de eerste watervoerende zandlaag uit het ondergrondmodel daarom gesplitst in twee lagen van gelijke dikte met dezelfde grondeigenschappen. De eigenschappen van Soil 3 zijn eveneens gelijk aan die van Soil 1 en Soil 2. Het aanwezige verval is gedefinieerd door de buitenwaterstand verminderd met de waterstand bij het uittredepunt (polderpeil of maaiveldhoogte bij uittredepunt). De reductie van het verval met de term $0,3D$, waarbij D de dikte van het slappe lagen pakket is, wordt verrekend op het kritieke verval, dus bij de sterkte kant.

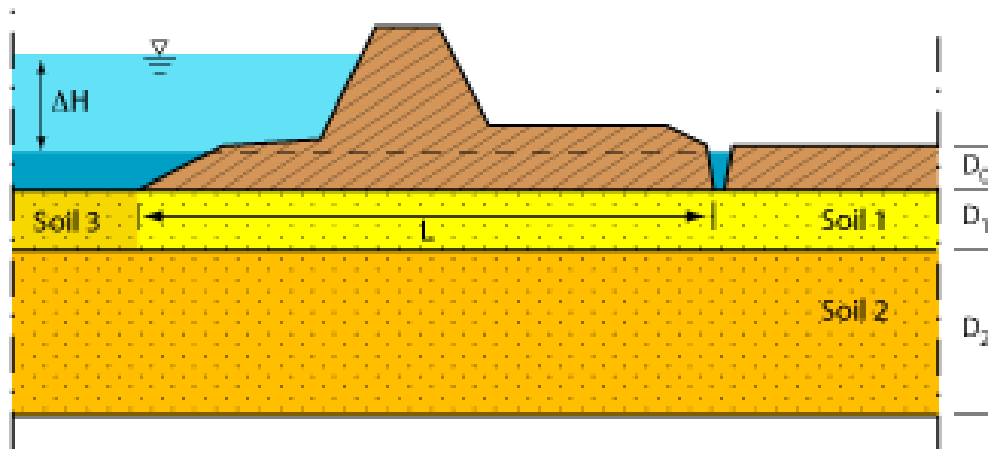


Figure C.1: Schematisering ondergrond voor neurale netwerk van Sellmeijer

D Use of WBI piping kernel

The WBI use of the piping kernel consists of three sub failure mechanisms: uplift, heave and backward erosion. The complete calculation is done by:

- 1 The calculation of the uplift safety by determining the vertical balance of weight of the subsoil and the waterpressure at the top of the aquifer.
- 2 The calculation of heave by checking the maximal gradient over the vertical waterflow at the uplift location. Heave is the vertical sand transport through the horizontal pipes towards the location of uplift breaching (the exit location.)The thickness layer is the distance where over heave occurs.
- 3 The calculation of internal erosion with Sellmeijer revised.
- 4 Checking the presence of sufficient horizontal seepage length (kwelweglengte)
- 5 Determination of the piping safety factor by dividing the required seepage length by the present seepage length.

Note that the seepage length is calculated by $(X_{Exit} - X_{Entry}) + DistanceToEntryPoint$. X_{Exit} is the exit point (point where the uplift is located), X_{Entry} is the location of the dike toe at riverside and $DistanceToEntryPoint$ is an optional user defined value, default 0.

The use by DAM of these functions is described in following paragraphs.

D.1 Uplift (uplift safety)

For the uplift calculation DAM uses the DAM uplift calculation described in [Appendix B](#)

D.2 Heave

This function of the kernel is decribed in paragraph 3.4 in ([Van Geer, 2017](#)).

In DAM is assumed that heave always occurs, until the connection to the WBI piping kernel is extended to the complete version (also adeptions in DAM UI)

Input of the kernel consists of:

Symbol	Unit	Description	Value in DAM
i	-	gradient at exit point	calculated based on the damping factor
$i_{c,h}$	-	critical exit gradient	calculated based on the damping factor
D_{cover}	m	total thickness of the cover sub-layer	calculated, see
h_{exit}	m NAP	piezometric head at the exit point	output kernel
Φ_{polder}	m	piezometric head in the hinterland (above reference level NAP)	HeadPI2

Table D.1: Input paramaters Heave

Output of the kernel for the heave calculation is:

- Z_h (limit state function value)
- FoS_h (factor of safety)
- $h_{c,h}$ (critical water level for heave)
- h_{exit} (piezometric head at the exit point)
- i (gradient at exit point)

D.3 Internal erosion (backward erosion)

The WBI piping kernel facilitates the models Bligh, Sellmeijer both in original as revised (WTI2011) form. For now the use by DAM is restricted to Sellmeijer revised (WTI 2011) This function of the kernel is described in paragraph 3.5 in ([Van Geer, 2017](#)).

Input of the kernel consists of:

Symbol	Unit	Description	Value in DAM
h	m	river water level (above reference level NAP)	WaterHeight (when using scenarios)
h_{exit}	m	phreatic level at the exit point (above reference level NAP)	calculated
m_p	-	model factor piping	1.0
γ_{water}	kN/m ³	volumetric weight of water	9.81
r_c	-	reduction factor providing the fraction of the blanket thickness by which the total head difference is reduced due to hydraulic resistance in the vertical exit channels	0.3
D_{cover}	m	total thickness of the cover layer at the exit point	calculated
$\gamma_{sub,particals}$	kN/m ³	submerged volumetric weight of sand particles	16.5
$\theta_{Sellmeijer,rev.}$	deg	bedding angle for Sellmeijer original	37
η	-	White's drag coefficient	0.25
d_{70}	m	70%-fractile of the aquifer's grain size distribution	from soilmaterials.mdb
d_{70m}	m	d70-reference value in Sellmeijer, revised	2.08E-4
κ	m ²	intrinsic permeability	calculated with k , ν_{water} and g
k	m/s	hydraulic conductivity (Darcy)	from soilmaterials.mdb
ν_{water}	m ² /s	kinematic viscosity of water at 10 degrees Celsius	1.33 E-6
g	m/s ²	gravitational constant	9.81
D	m	thickness of the aquifer	calculated
L	m	seepage length	calculated

Table D.2: Input paramaters Internal erosion

Output of the kernel for the internal erosion calculation is:

- Z_p (limit state function value)
- FoS_p (factor of safety)
- $h_{c,p}$ (critical water level for uplift)
- ΔH_c (critical head difference)
- $h - h_{exit} - r_c D_{cover}$ (reduced head drop this the head drop which is reduced by the head drop over the exit channel)

E REQDesignGeometry

For the purposes of policy studies or determining impact scope or emergency measures, it can be useful to generate a profile that corresponds to the stated safety factor. The stated safety factor can be given for stability inward and for piping. DAM Engine can make automatic geometry adaptations for this purpose using a number of basic assumptions.

Automatic profile adaptation in DAM Engine consists of the following steps:

- 1 Raising the crest (see [section E.1](#))
- 2 Reducing the gradient of the slope (see [section E.2](#))
- 3 Shoulder adaption (see [section E.3](#))

The order of the steps 2 and 3 of the adaption method is defined by *StabilityDesignMethod*. There are two options:

- Optimized Slope And Shoulder Adaption
Apply slope adaption when slip circle exits in slope, conform [section E.2](#), apply shoulder adaption when slip circle exits in polder (at right side of Dike toe at polder).
- Slope Adaption Before Shoulder Adaption
First apply slope adaption starting with a given slope (*SlopeAdaptionStartCotangent*), stepping with a given adaption (*SlopeAdaptionStepCotangent*) until a certain given slope (*SlopeAdaptionStepCotangent*); only after that apply shoulder adaption.

E.1 Raising the crest

During this step, DAM Engine checks whether the crest height complies with the required (in other words the stated) dike table height (DTH, *DikeTableHeight*).

If the crest height (the Z value for characteristic point Outer crest) is equal to or higher than the stated DTH, the profile will not be adapted. If the profile is lower than the stated DTH, DAM Engine adjusts the geometry and creates a new surface line based on the original slope gradients (α and β) and the original crest width (B), see [Figure E.1](#).

The slope gradients, and the crest width, are determined on the basis of the following characteristic points:

- The outer slope gradient (α) follows from the calculated gradient on the basis of the outer toe and the outer crest line. If there is an outer shoulder, the outer slope gradient is determined on the basis of the top of the outer shoulder and the outer crest line.
- The crest width (B) follows from the distance between the characteristic points in the outer crest line and inner crest line.
- The inner slope gradient (β) follows from the calculated gradient on the basis of the inner toe and the inner crest line. If there is an inner shoulder, the inner slope gradient will be determined on the basis of the top of the inner shoulder and the inner crest line.

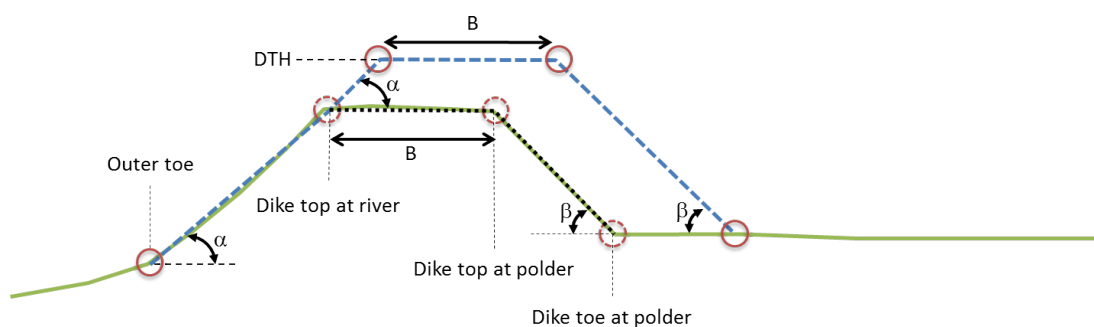


Figure E.1: Adapted geometry for DTH

The adapted geometry starts at the toe at riverside (outer toe) in the initial profile, see [Figure E.2](#). If there is no inner shoulder, the toe at polderside (inner toe) of the adapted profile will be further away on the profile than the original inner toe, see [Figure E.1](#). If the adapted geometry intersects with an inner shoulder, the top of the inner shoulder will be moved, see [Figure E.2](#).

In all adapted profiles, the geometry points within the adapted profile will be removed. The characteristic points will move in accordance with the adaptation of the geometry.

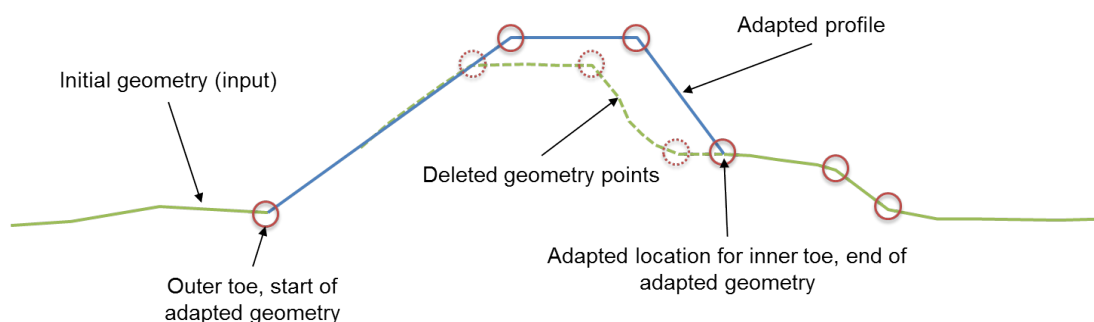


Figure E.2: Adapted geometry by deleting geometry points

If there is an outer shoulder, the adapted geometry will start at the shoulder base outside, see [Figure E.3](#).

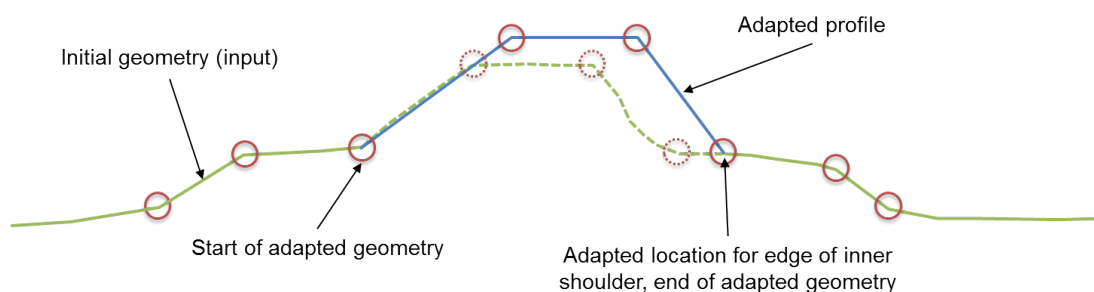


Figure E.3: Adapted geometry when outer shoulder is present

If the geometry adaptation results in the new dike base being so wide that the entire initial geometry is contained within the adapted profile, all the intermediate geometry points, including

the characteristic points in the inner shoulder, will be removed, see Figure E.4.

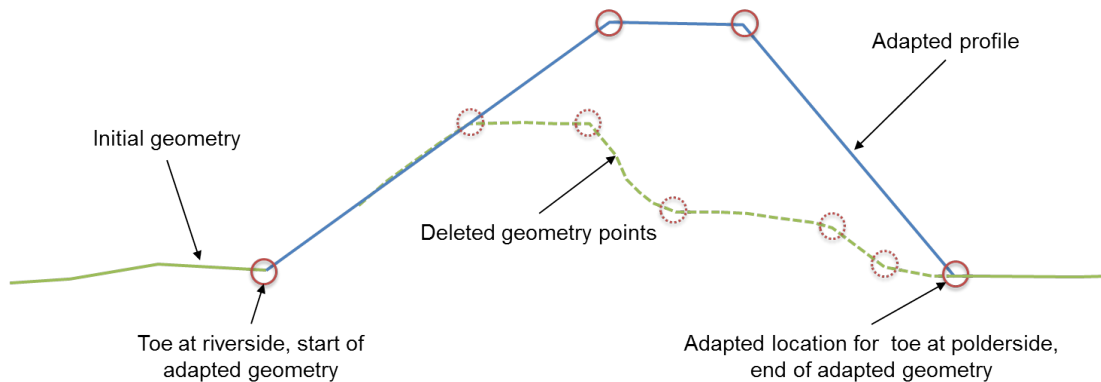


Figure E.4: Adapted geometry with starting point for geometry of outer toe and larger dike base

If there is a ditch in the profile, DAM Engine will move the ditch if the adapted inner toe is further away than the location of the inner toe in the initial profile. The ditch is moved along the unchanged part of the initial profile. If the ditch is moved, DAM Engine will maintain the original distance from the inner toe to the outer edge of the ditch (Δ). The original dimensions of the ditch will be maintained. See Figure E.5.

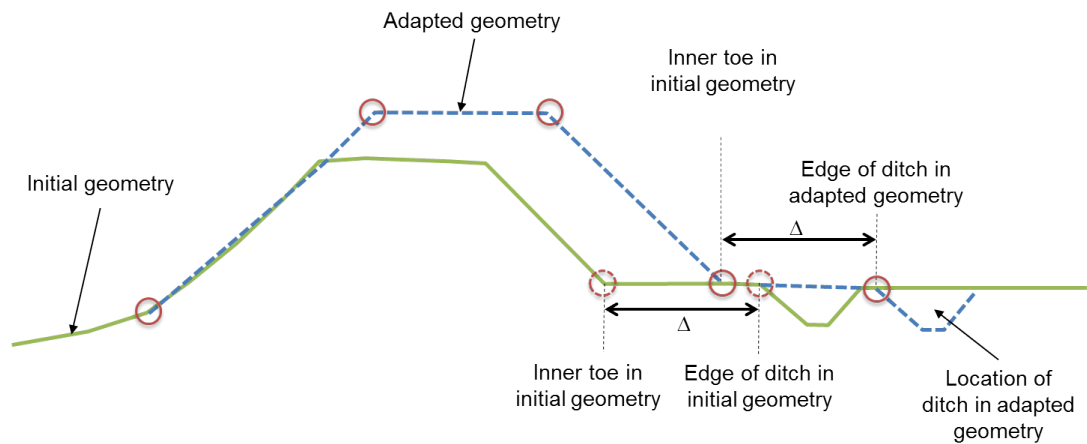


Figure E.5: Moving the ditch

E.2 Reducing the gradient of the slope

After the adaptation of the crest height in accordance with DTH (if necessary), DAM Engine will first carry out a stability calculation. If it should emerge that the exit point of the slip circle is on the inner slope and if the calculated safety factor is less than the stated safety factors, DAM Engine will (on condition that the profile adaptation option is on) reduce the gradient of the slope until the calculated safety factor \geq required safety factor and the exit point of the slip circle is on the inner slope, see Figure E.6. If the exit point is no longer on the inner slope and the calculated safety factor does not comply with the desired safety factor, DAM Engine will generate a stability shoulder, see ??.

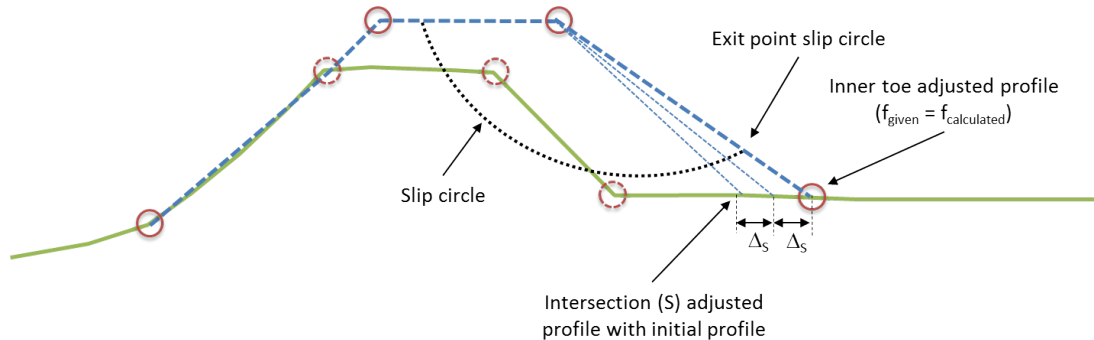


Figure E.6: Iterative reduction of the gradient of the inner slope on the basis of the exit point of the slip circle

E.3 Shoulder adaption

DAM Engine develops a stability shoulder iteratively as long as the slip circle does not intersect with the landslide slope (see section E.2) and the stated safety level has not yet been achieved. The maximum number of iteration stages is 200. This limit prevents DAM Engine getting stuck in an infinite iteration loop if the stated safety level is not achieved.

The algorithm used is based on moving the crest of the landslide shoulder in a straight line along an incline (α), see Figure E.7. The default value is 0.33 (1:3) but it can also be stated by the user (attribute StabilityShoulderGrowSlope).

The adaptation of the shoulder involves moving the inner toe in steps (Δ_s). The steps are in the horizontal direction and the standard steps are 1 metre in length but they can be changed by the user (attribute StabilityShoulderGrowDeltaX). Shoulder development stops when the calculated safety factor in the adapted profile \geq the stated safety factor.

The inner toe is used as the starting point for shoulder development. If there is already a shoulder in the original cross-section, the crest inner shoulder point is used as the starting point. During shoulder development, the crest of the shoulder remains horizontal, as with the raising of the crest, see section E.1.

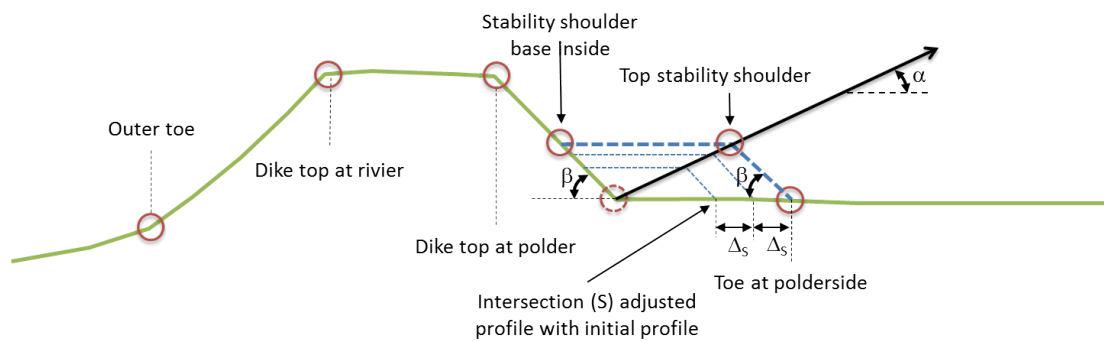


Figure E.7: Iterative shoulder development for macrostability

E.4 Restrictions use of design mode

In design mode a single stability model must be chosen; option Bishop/LiftVan is not possible.

F REQ Generation.PorePressures

The DAM Engine can combine the hydraulic data with a subsoil scenario. The result is a schematization of the pore pressures, usable for the failure mechanisms Piping and Macrosta-bility.

F.1 Conditions under which the automatic generation works

Under certain circumstances, the kernel must be able to produce the pore pressures in the geometry. If the following circumstances are met, the pore pressures will be schematized following the guidelines [Technisch Rapport Waterspanningen bij dijken (2004)] during a high water tide.

The conditions to automatically produce pore pressures are as follows:

- Minimum of one and maximum of two aquifers;
- The aquifers reach from one boundary to the other (CNS 8);
- The generator only works if the high water table is on the left side.

F.2 Procedure for schematisation of the pore pressures

The steps for the schematization of the pore pressures are:

- 1 The schematisation of the phreatic plane (see [section F.3](#)).
- 2 Initial schematisation of piezometric heads (see [section F.4](#)).
- 3 Checking for uplift (see [section F.5](#)).
- 4 Definitive schematisation of pore pressures (see [section F.6](#)).

F.3 Schematisation of the phreatic plane

There are currently two different approaches to the schematisation of the position of the phreatic plane: :

- 1 ExpertKnowledgeRRD
- 2 ExpertKnowledgeLinearInDike

The schematisation method can be selected by the user in the base data (attribute: PLLineCre-ationMethod). The schematisation method and the associated values can be defined at the location level.

The phreatic plane is referred to as Piezometric Line 1 (PL1).

F.3.1 ExpertKnowledgeRRD

The ExpertKnowledgeRRD method sets out the location of the phreatic plane at a maximum of 6 points: A to F. [Figure F.1](#) lists these points. The level of the phreatic plane is defined by entering a number of vertical offsets relative to the outer water level or the ground level. [Table F.1](#) lists for each point how it is determined/recorded. The location of the phreatic plane between the points is determined on the basis of linear interpolation.

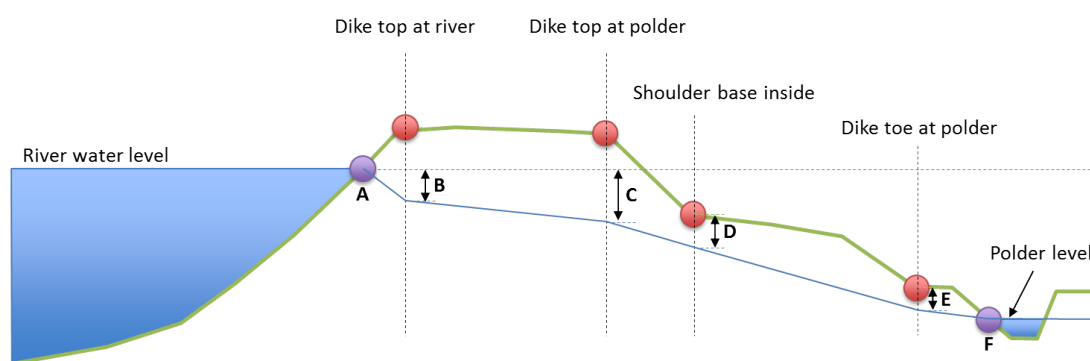


Figure F.1: Schematisation Phreatic line (PL1) Macrostability inward using ExpertKnowledgeRRD

Punt	Elevation determined by
A	Intersection of the water level with the outer slope (determined automatically)
B	Outer water level - stated offset
C	Outer water level - stated offset
D	Ground level Shoulder base inside - stated offset
E	Ground level Dike toe at polderside- stated offset
F	Intersection of polder level with ditch (is determined automatically).

Table F.1: Parameters for each schematisation point used to locate the phreatic plane in the ExpertKnowledgeRRD schematisation option

Lower levels relative to the reference point/plane are stated as positive values. When schematising a rise in the phreatic plane under the crest, the offset are stated as a negative value.

The determination of the intersection of the water level with the outer slope (point A in Table F.1) is made between the characteristic points Dike toe at river and Dike crest at river. So if the surface level left of the Dike toe at river is above the phreatic line the eventual intersections are ignored.

F.3.2 ExpertKnowledgeLineairDike

Here, the phreatic plane starts where the outer water level (Point A in Figure F.2 intersects the outer slope. It then continues in a straight line to point E and then to point F.

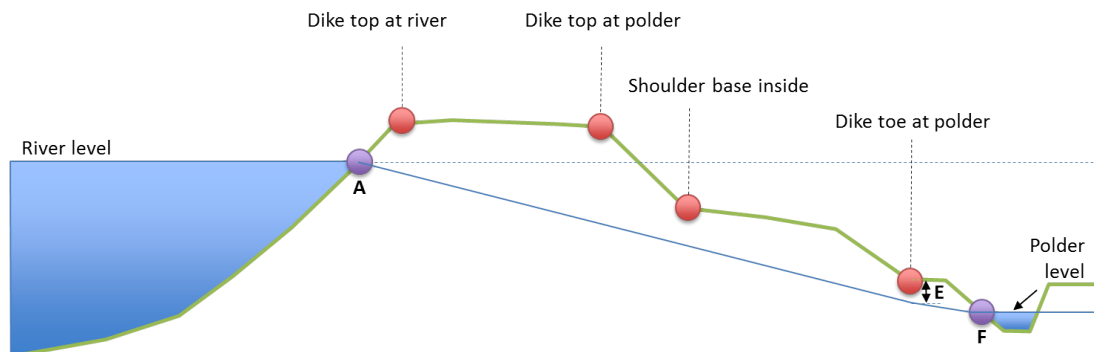


Figure F.2: Schematisation Phreatic line (PL1) Macro stability inward using ExpertKnowledgeLineair

F.3.3 Particular cases

The following checks are made:

Free water

The procedure must check that the phreatic plane along the dike does not extend beyond the slope. If this the case, the location is automatically adapted to follow the surface level one centimeter lower.

Free water at the polder side (right side of toe at polderside) is allowed.

No ditch, no shoulder

If there is no shoulder, point D will be omitted.

If there is no ditch, there are two possibilities:

1. The offset at Dike toe at polder (point E in Figure F.1) is defined; the offset at point E will be continued with a limit of 1 cm below the surface line.
2. The offset at Dike toe at polder (point E in Figure F.1) is not defined; the phreatic line at point E is equal to polder level and remains at this value until Surfacelevelinside.

Phreatic line goes up

The procedure must ensure that the location of the phreatic plane is not below the stated polder level at points D and E as a result of the stated offsets. If this is the case, the location of the phreatic plane will automatically be matched to the polder level. In addition, the procedure must ensure that the phreatic plane at points D and E is not higher than at the preceding points. Point C may be higher than point B.

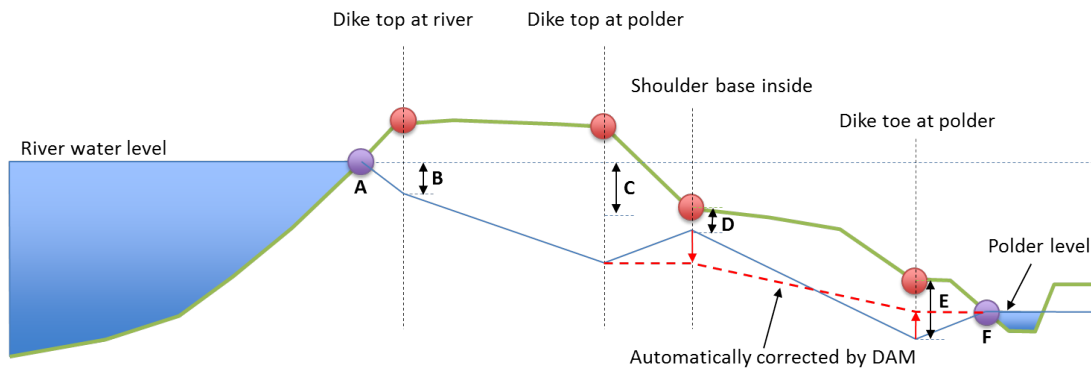


Figure F.3: Adaption of phreatic line (PL1) when initial line would go up

Surfaceline outside is higher than phreatic line outside

The determination of the intersection of the water level (point A in Table F.1) with the outer slope is made between the characteristic points Dike toe at river and Dike crest at river. So if the surfacelevel left of the Dike toe at river is above the phreatic line the eventual intersections are ignored. If the waterheight is below Z value of Dike to at river, schematisation of the phreatic line is not possible and a validation message is given. See also `../repos/dam/DamOverall/trunk/doc/DAM/General/-OverviewDataUIAndEngine.xlsx`

F.4 Initial schematisation of piezometric heads

DAM Engine can manage a maximum of two aquifers. DAM Engine also takes the penetration layer (TAW, 2004) into account. For the time being, this option works only with 1D soil profiles. If the calculations have to be made without a penetration layer, a value of 0 should be entered (attribute: PenetrationLength).

DAM Engine defines the aquifers from bottom to top (in the direction of the surface). A piezometric line (PL3) is assigned to the bottom layer (which is also an aquifer) (Figure F.4). The pore pressures in the penetration layer are schematised using PL2. PL4 will be allocated to any additional aquifer. Table F.2 gives an overview of the various piezometric lines and associated schematisation.

If several aquifers are stacked in succession one above the other, DAM Engine will allocate the same PL to all of them, assuming a hydrostatic range for the pore pressures. The separation between the aquifer and cohesive layer is then determined by the top of the highest aquifer in the stack.

For the purposes of the stability calculations, DAM Engine schematises the piezometric heads in the vertical direction using linear interpolation in the soft layers. A hydrostatic range is assumed in the dike body, the soil layers where the phreatic plane is located and the aquifers.

PL	Description
PL1	Phreatic line. For stability calculations with a stationary phreatic plane. The schematisation for PL1 is described in section F.3
PL2	<p>The pore pressure at the top of the penetration layer. The PL2 is not affected by the piezometric head in the underlying aquifer and it is constant (in other words, there is no damping) over the entire width of the cross-section. The user enters the value for PL2 (attribute: HeadPL2), as well as the thickness of the penetration layer. DAM 1.0 uses the PL2 only if the thickness of the penetration layer >0 m.</p> <p>Note: at present, the use of PL2 is still limited to 1D soil profiles.</p>
PL3	<p>Pore pressure in the bottom aquifer. The value can be entered (attribute: HeadPL3). If no value is entered, PL3 is considered to be the same as the outer water level stated in the scenarios (see section 2.6).</p> <p>The value for PL3 at the inner toe (Figure F.5) depends on the stated damping factor (attribute: DampingPL3). This damping factor expresses the degree to which PL3 is damped to PL2. Zero means no damping (PL3 is constant). And the value 1 suggests full damping to PL2 (attribute: PL2). If no value has been entered for PL2, the polder water level will be used (attribute: PolderLevel). Beyond the inner toe, the PL3 declines to the polder level at a gradient to be stated (attribute: Slope-DampingPiezometricHeightPolderSide). The PL3 then matches the polder level. A value can be entered for the gradient of this PL slope. The default value is 0. This means there is no slope.</p>
PL4	<p>Pore pressure in an intermediate aquifer (if present). The schematisation for PL4 is similar to that described for PL3. However, PL3 should be read as PL4.</p> <p>Note: Both PL3 and PL4 use the same gradient for the slope of the PL line on the polder side.</p>

Table F.2: Overview and description of piezometric lines

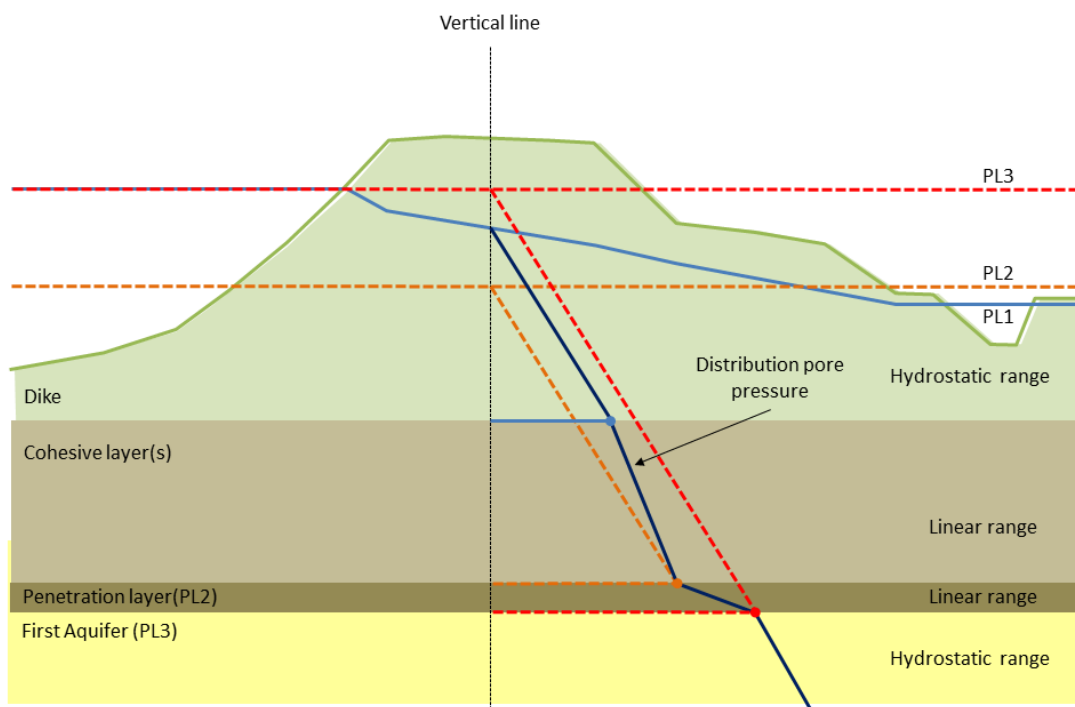


Figure F.4: Schematization of the water pressures in 1 aquifer situation

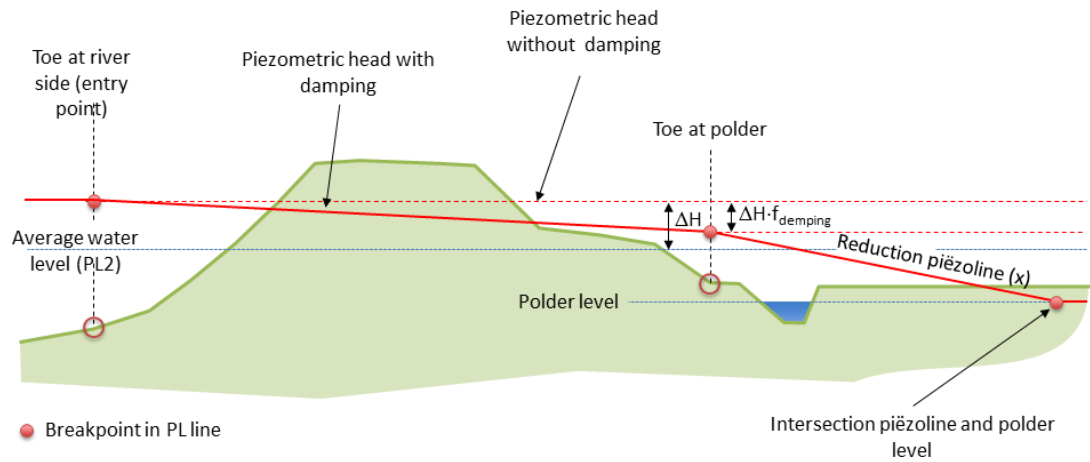


Figure F.5: Use of damping factor (f) and reduction of piezometric level at polder side (x) for horizontal schematization of water levels

F.5 Correction for uplift

The check for uplift is described in [Appendix B](#)

If uplift is calculated, DAM Engine lowers the PL3 or PL4 (if present) to a value in which uplift just no longer occurs, in other words to the point at which there is an unstable equilibrium (zie [Figure F.6](#)).

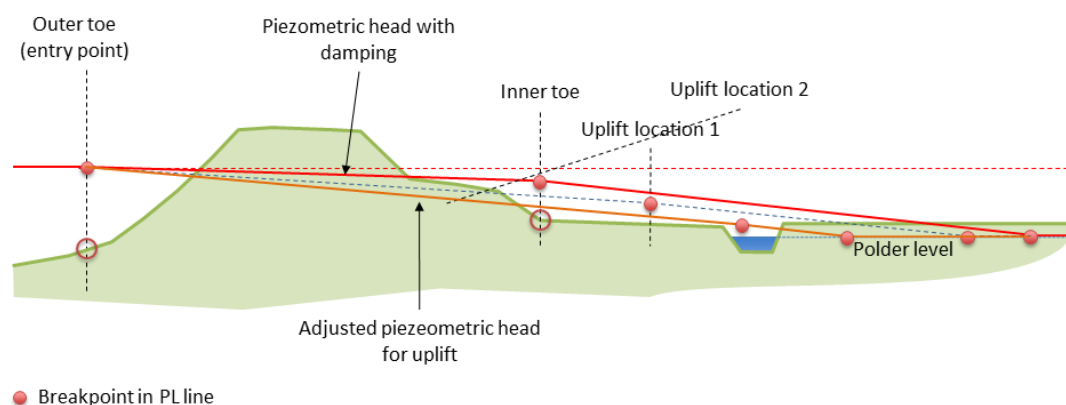


Figure F.6: Lowering of piezometric head in the presence of uplift. DAM Engine checks for uplift starting at the inner toe and extending to the edge of the profile and adapts the piezometric head accordingly until an unstable equilibrium is attained.

The PL3/PL4 continues from this point on with the specified slopegradient (*SlopeDamping-PiezometricHeightPolderSide*) until polderlevel with the condition that PL3/PL4 is always descending from left to right.

When a ditch is present Uplift is checked conform Bijlage 1 of Technisch Rapport Waterspanningen bij dijken (TAW, 2004), without the last bullet (thickness of layer under ditch is between the width of the bottom and width of the ditch). DAM Engine follows the flowchart of Figure F.7.

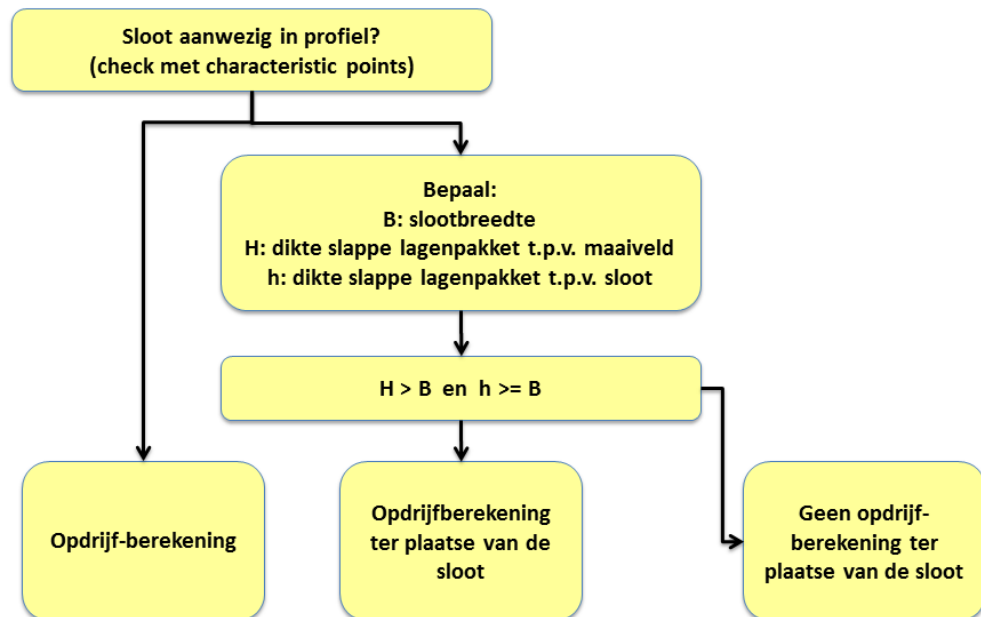


Figure F.7: Flowchart check Uplift when ditch is present.

Next figures are explaining the flowchart.

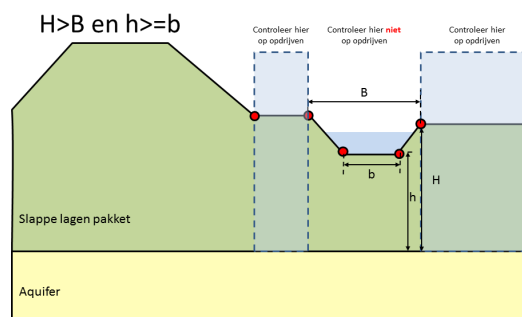


Figure F.8: Uplift calculation when ditch is present, thickness layer is larger than ditch

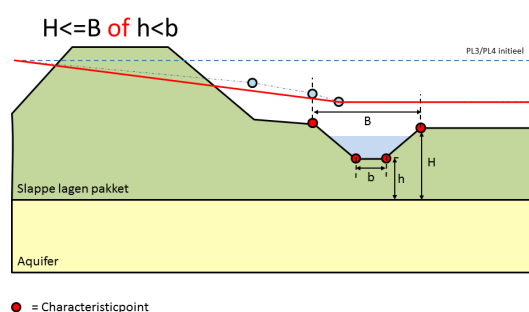


Figure F.9: Uplift calculation when ditch is present, thickness layer is smaller than ditch

When uplift occurs at the location of the ditch it is possible that by deleting previous points of the PL line also uplift occurs between toe and ditch. While using the initial PL line, no uplift occurs. See Figure F.10. An extra check is made for uplift between toe and ditch ("Hier weer opdrijven")

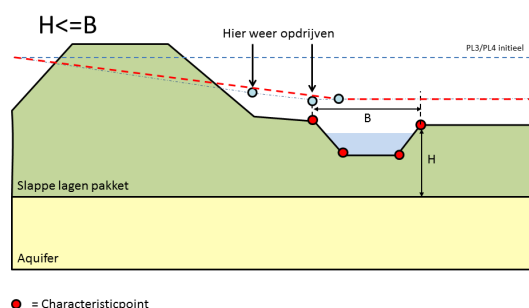


Figure F.10: Uplift calculation between toe and ditch after uplift calculation at ditch

F.6 Definitive schematisation pore pressures

The definitive schematisation for the pore pressures is produced on the basis of the initial generation of the pore pressures and the check for uplift. This involves the straight-line interpolation of values in a horizontal direction between the various calculated tipping points in the PL lines.

